


Please read carefully and
use according to the
instructions!

HOJDÁVAK

Safety rope for BABY
SPRING

Instructions for tying the safety rope to the spring for the BABY hammock

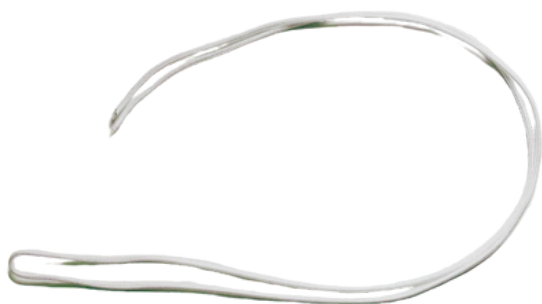

Fold the safety
rope in half.



We attach the
screw-in
carabiner.
We pull the
created loop of
the rope through
the upper part of
the spring and at
the same time
through the
carabiner.



We thread the ends
of the rope through
its eye, creating a
fox loop.



Thread both ends of the rope
through the spring and tighten
slightly.



Place a carabiner with a safety catch in the lower eye of the spring.

Pass one end of the rope through the eye of the spring and the carabiner at the same time.

We create a knot on the rope at a distance of approximately 60 cm from the upper carabiner.

If the knot prevents swinging, we can loosen it and move it a longer distance as needed.

WE NEVER REMOVE THE ROPE COMPLETELY!





To keep the rope out of the way, we can tie another knot around the spring eye.

Now the spring is ready to use for the BABY hammock.

TAKE THE TEST!

Before first use, and after each manipulation with the safety rope, test the correct installation of the cradle.

Grasp the large carabiner under the spring and, by applying downward pressure, stretch the spring as far as the safety rope will allow.

At maximum spring tension, the cradle should hang above the ground. If the cradle touches the ground, shorten the safety rope by moving both knots up closer to the spring.

